




METAL DISINTEGRATORS

MINI HEAD Portable Disintegrator Head

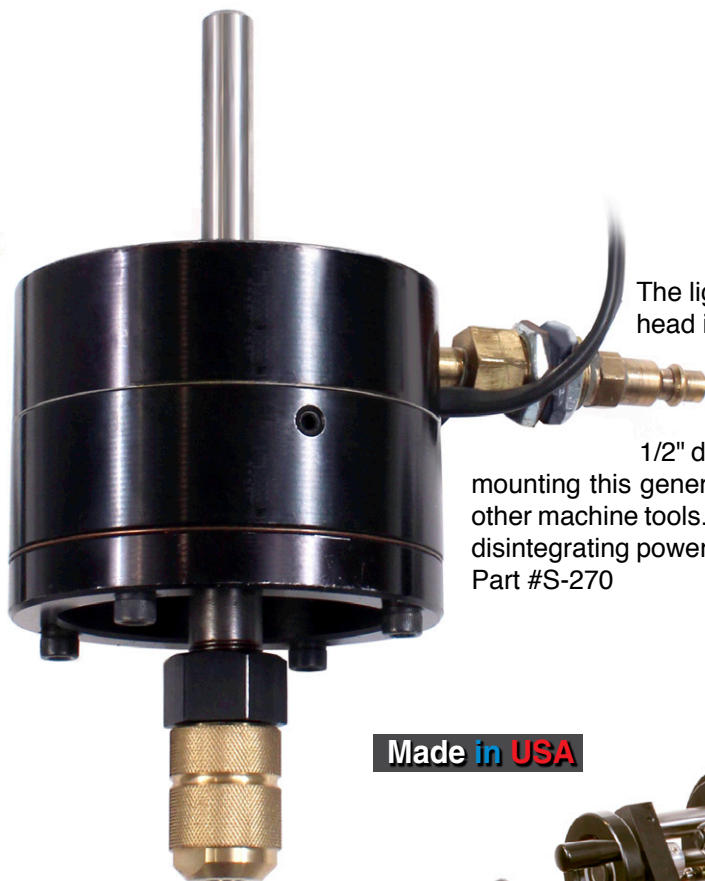

The lightweight, compact Mini DC disintegrating head is designed to remove broken tooling from #2 to 3/4" (2 mm to 19.05 mm) in a single pass. Overall length 8.25" (209 mm). Operates at any angle. A straight arbor 1/2" diameter x 2.75" long (12.7 x 70 mm) allows mounting this general purpose head in magnetic fixtures and other machine tools. A special power coolant cable delivers the disintegrating power and coolant to the head. 1 Year Warranty. Part #S-270

Made in USA



Mini magnetic 800-lb. (362.8 kg) base with fixture for Mini Head (optional)

800 lb. permanent magnet holds firmly to all ferrous surfaces. Enables precise manual feed.

Part # A1425

Vacuum-base version Part #A1426

V0420



REMOVE BROKEN TAPS BOLTS & DRILLS IN MINUTES

PERFORMANCE

BROKEN TOOLING ONE INCH DEEP	REMOVAL TIME
0-80 to 10-32 No. 1.6	UNDER 1 min.
1/4" No. 6	1 - 2 min.
5/16" No. 8	1.5 - 2.5 min.
3/8" No. 10	1.5 - 2 min.
1/2" No. 14	2 - 4 min.
5/8" No. 18	1.5 - 2.5 min.
3/4" No. 22	2.5 - 3.5 min.

ELECTRO ARC MANUFACTURING A STILLION INDUSTRIES COMPANY

USA
Phone: (734) 475-8527
Fax: (734) 475-2902
sales@electroarc.com

www.electroarc.com



UK
Phone +44 (0) 1384 231535
Fax: +44 (0) 1384 252834
sales@electroarc.co.uk